

Table scales WPT/F



Table scales series /F have low profiled esthetic construction of weighing platform and plastic head. The head PUE C/31 is offered with backlit LCD display and possibility of power supply by batteries. Changeable angle of head placing, allows for adjustment of scale according to user requirements.






Counting pieces



Checkweighing

Capacities for this series of scales are from 3kg/1 g to 30kg/10 g. Stabilization time is approximately 2 seconds. Scales are equipped with function of automatic tare and tare memory. Non verified scales, also have function of locking the result of measurement and measuring in Newton's. Optionally, RS 232 output is installed.

Optionally, scales are equipped with possibility of weighing loads outside the main weighing platform (so called under hook weighing). This means of mass measuring is an alternative for loads with non-standard dimensions and shapes and those which create magnetic field.

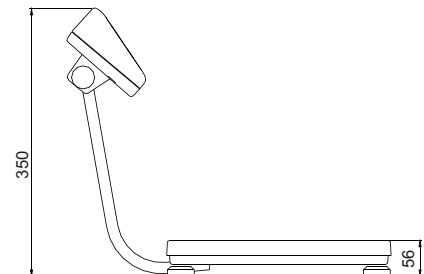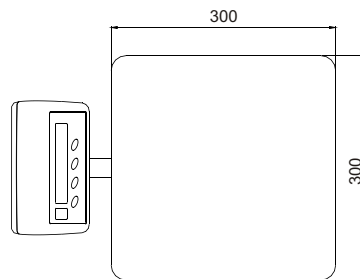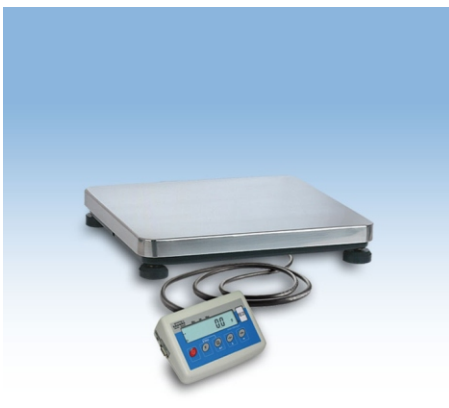

Technical data:

	WPT/F 3/6C	WPT/F 6/15C	WPT/F 15/30C
	WPT/F 3/6C/K	WPT/F 6/15C/K	WPT/F 15/30C/K
Max capacity	3/6 kg	15 kg	30 kg
Readability	1/2 g	2/5 g	5/10 g
Tare range	-6 kg	-15 kg	-30 kg
Pan size		300 × 300 mm	
Working temperature		-10° - +40 °C	
Output signal		RS 232	
Power supply		230V 50Hz AC / 11V AC and 6 x AA	
Display		LCD (backlit)	
Mass		5 kg	

Additional equipment:

RACK FOR HEAD	EXTERNAL RECHARGEABLE BATTERY PACK
LCD ADDITIONAL DISPLAY	SUITCASE FOR BALANCE
LARGE SIZE ADDITIONAL DISPLAY	COMPUTER SOFTWARE: PW-WIN 2005
"KAFKA" THERMAL PRINTER	COMPUTER SOFTWARE: RAD-KEY 2000, REC-FS 2000, LS-FS 2000
NEEDLE PRINTER "EPSON"	EXTERNAL POWER OUTPUT

RADWAG

26-600 Radom • Bracka Street 28 • POLAND • Phone: +48 48 3848800 • Fax: +48 48 3850010 • www.radwag.com • e-mail:export@radwag.com